

NEW

CALLA™

Now available with Colorations™ Colors

Square Lay-in, Tegular


smooth texture



10-YEAR Availability



Calla Beveled Tegular with Suprafine® XL 9/16" suspension system

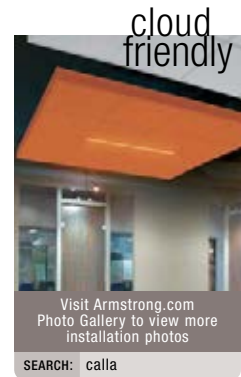

Visit Armstrong.com Photo Gallery to view more installation photos

SEARCH: calla

KEY SELECTION ATTRIBUTES

- Now available in Colorations 13 standard colors with coordinating suspension systems and trim. Made-to-order Sherwin-Williams® colors available.
- The smoothest finish mineral fiber ceiling panel available
- Cool White visual
- Excellent combination of acoustical performance; NRC (0.85) and CAC (28)\*
- Washable\*, Impact-resistant, Scratch-resistant, Soil-resistant
- Product can be recycled through the Armstrong Recycling Program
- Compatible with the TechZone™ Ceiling Systems\*
- 30-Year Limited System Warranty against visible sag, mold/mildew, and bacterial growth

TYPICAL APPLICATIONS

- Offices – open plan and closed plan, and multiple use spaces
- Healthcare – assists in addressing HIPAA and FGI acoustical requirements
- Classrooms
- Corridors
- Lobbies/reception areas
- Department stores/retail

DETAIL (Other Suspension Systems compatible. Refer to listing on reverse side of this data page.)



1. Calla Beveled Tegular
2. Calla Square Lay-in
3. Calla Beveled Tegular with Suprafine 9/16" suspension system
4. Calla Beveled Tegular with Silhouette® XL 9/16" suspension system with 1/4" or 1/8" reveal
5. Calla Beveled Tegular with Interlude® XL 9/16" suspension system

COLOR



\* White only



**CALLA™**

Now available with Colorations™ Colors

**Square Lay-in, Tegular**  
smooth texture

**68% RECYCLED CONTENT**

**LEED®**



Calculate LEED contribution at [armstrong.com/greengenie](http://armstrong.com/greengenie)

\*LOCATION DEPENDENT


**VISUAL SELECTION**

**PERFORMANCE** Dots represent high level of performance.

Edge Profile	Susp. Dwg. Pgs. 271-275 armstrong.com/catdwgs	Item No.	Dimensions	Acoustics		Fire Rating	Light Reflect	Anti-Mold & Mildew	Sag Resist	Certified Low VOC Emissions	Durability				Primary (Embodied) Energy	Recycled Content*	Recycle Program	Warranty*		
				NRC	CAC						AC	Wash	Impact	Scratch					Soil	
<b>CALLA Square Lay-in</b>				UL Classified**																
15/16" Square Lay-in	1	<b>2820</b>	24 x 24 x 7/8" □	0.85	28	170	Class A	0.86	•	•	•	•	•	•	•	•	•	•	•	
	1	<b>2821</b>	24 x 48 x 7/8" □	0.85	28	170	Class A	0.86	•	•	•	•	•	•	•	•	•	•	•	
<b>CALLA Tegular</b>																				
15/16" Beveled Tegular	15	<b>2822</b>	24 x 24 x 7/8" □	0.85	28	170	Class A	0.86	•	•	•	•	•	•	•	•	•	•	•	
9/16" Beveled Tegular	29, 43, 48, 52, 56, 60	<b>2824</b> __♦♦	24 x 24 x 7/8" □	0.85††	28	170	Class A	0.86**	•	•	•	•**	•	•	•	•	•	•	•	

♦♦ Available in Colorations Standard colors. When specifying or ordering Colorations, add the 2-letter suffix to the end of the item number (e.g., 2824LA – Lagoon)  
 †† Products in Colorations finish could see a decrease of 5-7% in NRC value  
 \*\* White only

**COLORATIONS COLOR SELECTION** Due to printing limitations, shade may vary from actual product.

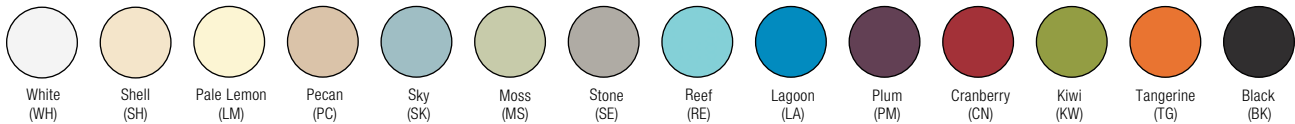

**SUSPENSION SYSTEMS**



**PHYSICAL DATA**

**Material**  
Wet-formed mineral fiber with acoustically transparent membrane

**Surface Finish**  
Acoustically transparent membrane with factory-applied latex paint

**Fire Performance**  
ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index 25 or less. Smoke Developed Index 50 or less. (UL labeled)

**ASTM E1264 Classification**  
Type IV, Form 2, Pattern E  
Fire Class A

**Sag Resistance**  
HumiGuard® Plus – superior resistance to sagging in high humidity conditions up to, but not including, standing water and outdoor applications.

**Anti-Mold/Mildew & Bacteria**  
BioBlock® Plus contains an anti-microbial treatment and provides guaranteed resistance against growth of mold/mildew and Gram-positive and Gram-negative odor/stain-causing bacteria for 30 years.

**VOC Emissions**  
Third party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.1, 2010. This standard is the guideline for low emissions in LEED, CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

**Design Considerations**  
Combining materials with different run dates may result in shade variations. Order attic stock for any anticipated future needs.

**High Recycled Content\***  
Classified as containing greater than 50% total recycled content. Total recycled content based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines.

**Insulation Value**  
R Factor – 2.9 (BTU units)  
R Factor – 0.445 (Watts units)

**30-Year Performance Guarantee & Warranty†**  
When installed with Armstrong Suspension System. Details at [armstrong.com/warranty](http://armstrong.com/warranty)

**Weight: Square Feet/Carton**  
2820, 2822, 2824 – 1.0 lbs/SF; 40 SF/ctn  
2821 – 1.0 lbs/SF; 48 SF/ctn

