


**CIRRUS®**  
**Tegular**  
 medium texture



**10-YEAR Availability** Items 584, 589




Cirrus Beveled Tegular with Suprafine® 9/16" suspension system (Pg. 266)

**KEY SELECTION ATTRIBUTES**

- Refined visual
- Excellent sound absorption
- Ceiling-2-Ceiling™ Post-consumer Recycled Content options: Items 589HRC, 539HRC, 584HRC, 535HRC. 71% Pre-consumer; 15% Post-consumer
- 94% Biobased content (see page 331)

**TYPICAL APPLICATIONS**

- Offices
- Healthcare – assists in addressing HIPAA and FGI acoustical requirements
- Conference rooms
- Lobbies
- Department stores/retail
- Public spaces/areas




Visit [Armstrong.com](http://Armstrong.com) Photo Gallery to view more installation photos  
 SEARCH: cirrus

**COLOR SELECTION** Due to printing limitations, shade may vary from actual product.



Items 584, 589 are available in colors. All other items are available in White only. Colored ceilings are dye-lotted and should be segregated by dye lot. Do not mix.

**DETAIL** (Other Suspension Systems compatible. Refer to listing on page 152.)

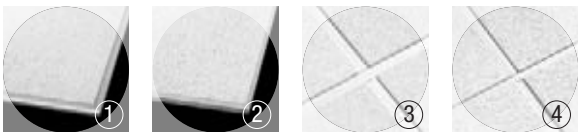

1. Cirrus Angled Tegular
2. Cirrus Beveled Tegular
3. Cirrus Angled Tegular with Prelude® 15/16" suspension system
4. Cirrus Beveled Tegular with Suprafine 9/16" suspension system

**CIRRUS®**  
Tegular  
medium texture

HRC items contain 15% or greater post-consumer recycled ceilings



UP TO **86%** RECYCLED CONTENT

**EPD**  
AVAILABLE For select items only

**LEED®**



Calculate LEED contribution at [armstrong.com/greengenie](http://armstrong.com/greengenie)

\*LOCATION DEPENDENT


**VISUAL SELECTION**

**PERFORMANCE** Dots represent high level of performance.

Edge Profile	Susp. Dwg. Pgs. 273-277 <a href="http://armstrong.com/catdws">armstrong.com/catdws</a>	Item No.	Dimensions (Inches)	Acoustics		Fire Rating	Light Reflect (White Only)	Anti-Mold & Mildew	Sag Resist	Certified Low VOC Emissions	Durability	Primary (Embodied) Energy	Recycled Content*	Recycle Program	Warranty†	
				NRC	CAC											
<b>CIRRUS Tegular</b>																
	13	<b>584</b> ** <b>584HRC</b> <b>584M</b>	24 x 24 x 3/4" □	0.70	35	Class A	0.86	•	•	•	Std	Below 11MJ/SF	High High High	•	30	
			24 x 24 x 3/4" □	•	•	•	•	•	•	•	•	•	•	•	•	
			<b>578</b>	24 x 24 x 3/4" □	0.35	35	Fire Guard	0.86	•	•	-	Std	-	Std	•	30
				24 x 24 x 7/8" □	0.70	38	Class A	0.86	•	•	-	Std	-	High	•	30
			<b>572**</b>	24 x 24 x 7/8" □	0.70	40	Class A	0.86	•	•	-	Std	-	High	•	30
				24 x 24 x 7/8" □	•	•	•	•	•	•	•	•	•	•	•	•
			<b>581**</b>	24 x 48 x 7/8" □	0.70	40	Class A	0.86	•	Std	-	Std	-	High	•	10
				24 x 48 x 7/8" □	•	•	•	•	•	•	•	•	•	•	•	•
	<b>535</b> <b>535HRC</b>	24 x 48 x 3/4" □	0.70	35	Class A	0.86	•	Std	•	Std	•	High High	•	10		
		24 x 48 x 3/4" □	•	•	•	•	•	•	•	•	•	•	•	•		
	<b>FastSize™</b>	W: 4" - 24" / L: 4" - 48" 3/4" thick	0.70	35	Class A	0.86	•	Std	•	Std	•	Std	•	10		
		•	•	•	•	•	•	•	•	•	•	•	•	•		
	29, 44, 48, 52, 56, 60	<b>589</b> ** <b>589HRC</b> <b>589M</b>	24 x 24 x 3/4" □	0.70	35	Class A	0.86	•	•	•	Std	•	High High High	•	30	
			24 x 24 x 3/4" □	•	•	•	•	•	•	•	•	•	•	•	•	
			<b>538**</b>	24 x 24 x 7/8" □	0.70	38	Class A	0.86	•	•	-	Std	-	High	•	30
				24 x 24 x 3/4" □	0.35	35	Fire Guard	0.86	•	•	-	Std	-	Std	•	30
			<b>576**</b>	24 x 24 x 7/8" □	0.70	40	Class A	0.86	•	•	-	Std	-	High	•	30
				24 x 24 x 7/8" □	•	•	•	•	•	•	•	•	•	•	•	•
			<b>583**</b>	24 x 48 x 7/8" □	0.70	40	Class A	0.86	•	Std	-	Std	-	High	•	10
				24 x 48 x 7/8" □	•	•	•	•	•	•	•	•	•	•	•	•
	<b>539</b> <b>539HRC</b>	24 x 48 x 3/4" □	0.70	35	Class A	0.86	•	Std	•	Std	•	High High	•	10		
		24 x 48 x 3/4" □	•	•	•	•	•	•	•	•	•	•	•	•		
	<b>FastSize™</b>	W: 4" - 24" / L: 4" - 48" 3/4" thick	0.70	35	Class A	0.86	•	Std	•	Std	•	Std	•	10		
		•	•	•	•	•	•	•	•	•	•	•	•	•		

\*\* Add 2-letter color suffix to item number when specifying or ordering (e.g., 584 Q B).

**SUSPENSION SYSTEMS**



**PHYSICAL DATA**

**Material**

Wet-formed mineral fiber

**Surface Finish**

Factory-applied latex paint

**Fire Performance**

ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index 25 or less. Smoke Developed Index 50 or less. (UL labeled) Fire Guard™: A fire resistive ceiling when used in applicable UL assemblies

**ASTM E1264 Classification**

Type III, Form 1, Pattern E I  
Fire Class A

**Sag Resistance**

HumiGuard® Plus – superior resistance to sagging in high humidity conditions up to, but not including, standing water and outdoor applications. Excludes items 535, 539, 581, 583.

**Anti Mold/Mildew & Bacteria**

BioBlock® Plus contains an anti-microbial treatment and provides guaranteed resistance against growth of mold/mildew and Gram-positive and Gram-negative odor/stain-causing bacteria for 30 years.

**VOC Emissions**

Third party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.1, 2010. This standard is the guideline for low emissions in LEED, CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

**Primary (Embodied) Energy**

See all LCA information on our EPD's.

**High Recycled Content\***

Contains greater than 50% total recycled content. Total recycled content based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines.

**Insulation Value**

R Factor – 1.9 (BTU units)  
R Factor – 0.33 (Watts units)

**30-Year Performance Guarantee & Warranty†**

When installed with Armstrong Suspension System. Details at [armstrong.com/warranty](http://armstrong.com/warranty)

**Weight; Square Feet/Carton**

534, 538, 572, 576 – 1.38 lbs/SF; 40 SF/ctn  
535, 539, 581, 583 – 1.21 lbs/SF; 48 SF/ctn  
577, 578 – 1.25 lbs/SF; 48 SF/ctn  
584, 589 – 1.06 lbs/SF; 48 SF/ctn

**Minimum Order Quantity**

1 carton

**Metric Items Available**

584M, 578M, 534M, 572M, 581M, 535M, 589M, 538M, 577M, 576M, 583M, 539M – Metric items are subject to extended lead times and minimum quantities. Contact your representative for more details.



TechLine<sup>SM</sup> / 1 877 ARMSTRONG  
[armstrong.com/commceilings](http://armstrong.com/commceilings)  
(search: cirrus)  
BPCS-3012-414

LEED® is a registered trademark of the U.S. Green Building Council  
All other trademarks used herein are the property of AWI Licensing Company and/or its affiliates © 2013 AWI Licensing Company  
Printed in the United States of America

