


# MESA™ /MESA Second Look

## Square Lay-in & Tegular

fine texture



Mesa with Suprafine® 9/16" suspension system (Pg. 266)

### KEY SELECTION ATTRIBUTES

- Fine-textured visual
- Excellent sound blocking – items 686, 687
- 100% Biobased content (see page 331)
- Non-directional visual reduces installation time and scrap (excludes Second Look items)
- Smaller size panels available (1 carton min. order). Info: [armstrong.com/specials](http://armstrong.com/specials)
- 30-Year Limited System Warranty against visible sag, mold/mildew, and bacterial growth

### TYPICAL APPLICATIONS

- Offices/conference rooms
- Healthcare – assists in addressing HIPAA and FGI acoustical requirements (excludes items 680 and 683)
- Schools/classrooms
- Corridors
- Lobbies/reception areas
- Computer rooms



Visit [Armstrong.com](http://Armstrong.com) Photo Gallery to view more installation photos


SEARCH: mesa

### FACE VIEW




1. Mesa Second Look II – Scoring  
Created nominal 24 x 24" squares

### DETAIL (Other Suspension Systems compatible. Refer to listing on page 188.)



1. Mesa  
2. Mesa with Suprafine 9/16" suspension system

### COLOR



# MESA™ /MESA Second Look® II

Square Lay-in & Tegular  
fine texture

UP TO **77%** RECYCLED CONTENT

**LEED®**

acoustics energy daylight & views indoor air quality renewable materials recycled content waste mgmt local\* materials

EPD AVAILABLE





Calculate LEED contribution at [armstrong.com/greengenie](http://armstrong.com/greengenie)

\*LOCATION DEPENDENT

## VISUAL SELECTION


## PERFORMANCE

Dots represent high level of performance.

Edge Profile	Susp. Dwg. Pgs. 273-277 <a href="http://armstrong.com/catdwgs">armstrong.com/catdwgs</a>	Item No.	Dimensions (Inches)	Acoustics		Fire Rating	Light Reflect	Anti-Mold & Mildew	Sag Resist	Certified Low VOC Emissions	Durability	Primary (Embodied) Energy	Recycled Content*	Recycle Program	Warranty*
				NRC	CAC										
<b>MESA</b>															
UL Classified															
BioBlock+															
Humi-Guard+															
Scratch															
Below 11MJ/SF															
Yes															
No. of Years															
15/16" Square Lay-in	1	<b>680</b>	24 x 24 x 3/4"	0.60	33	Class A	0.85	•	•	•	•	•	High	•	30
	1	<b>683</b>	24 x 48 x 3/4"	0.60	33	Class A	0.85	•	•	•	•	•	High	•	30
	1	<b>Other Sizes</b>	W: 12" - 30" / L: 18" - 72" 3/4" Thick	0.60	33	Class A	0.85	•	•	•	•	•	High	•	30
15/16" Angled Tegular	11	<b>681</b>	24 x 24 x 3/4"	0.60	35	Class A	0.85	•	•	•	•	•	High	•	30
	11	<b>686**</b>	24 x 24 x 3/4"	0.60	40	Class A	0.85	•	•	•	•	•	High	•	30
	11	<b>684</b>	24 x 48 x 3/4"	0.60	35	Class A	0.85	•	•	•	•	•	Std	•	30
	11	<b>Other Sizes</b>	W: 12" - 30" / L: 18" - 72" 3/4" Thick	0.60	35	Class A	0.85	•	•	•	•	•	Std	•	30
9/16" Beveled Tegular	29, 44, 48, 52, 56, 60	<b>682</b>	24 x 24 x 3/4"	0.60	35	Class A	0.85	•	•	•	•	•	High	•	30
	29, 44, 48, 52, 56, 60	<b>687**</b>	24 x 24 x 3/4"	0.60	40	Class A	0.85	•	•	•	•	•	High	•	30
	29, 44, 48, 52, 56, 60	<b>685</b>	24 x 48 x 3/4"	0.60	35	Class A	0.85	•	•	•	•	•	Std	•	30
	29, 44, 48, 52, 56, 60	<b>Other Sizes</b>	W: 12" - 30" / L: 18" - 72" 3/4" Thick	0.60	35	Class A	0.85	•	•	•	•	•	Std	•	30
<b>MESA Second Look II</b>															
15/16" Angled Tegular	11	<b>688</b>	24 x 48 x 3/4"	0.60	35	Class A	0.85	•	•	•	•	•	High	•	30
															

\*\* High-CAC items not available in other sizes.

## SUSPENSION SYSTEMS

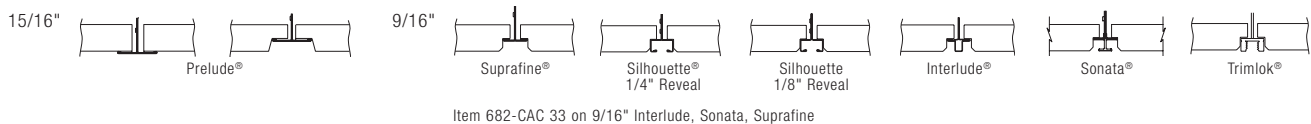

Item 682-CAC 33 on 9/16" Interlude, Sonata, Suprafine

## PHYSICAL DATA

### Material

Wet-formed mineral fiber

### Surface Finish

Factory-applied latex paint

### Fire Performance

ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index 25 or less. Smoke Developed Index 50 or less. (UL labeled)

### ASTM E1264 Classification

Type III, Form 2, Pattern C E  
Fire Class A

### Sag Resistance

HumiGuard® Plus – superior resistance to sagging in high humidity conditions up to, but not including, standing water and outdoor applications.

### Anti Mold/Mildew & Bacteria

BioBlock® Plus contains an anti-microbial treatment and provides guaranteed resistance against growth

of mold/mildew and Gram-positive and Gram-negative odor/stain-causing bacteria for 30 years.

### VOC Emissions

Third party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.1, 2010. This standard is the guideline for low emissions in LEED, CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

### Primary (Embodied) Energy

See all LCA information on our EPD's.

### High Recycled Content\*

Contains greater than 50% total recycled content. Total recycled content based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines.

### Insulation Value

R Factor – 1.6 (BTU units)  
R Factor – 0.28 (Watts units)

### 30-Year Performance Guarantee & Warranty\*

When installed with Armstrong Suspension System. Details at [armstrong.com/warranty](http://armstrong.com/warranty)

### Design Consideration

Do not mix Mesa Second Look with Standard Mesa in the same room.

### Weight; Square Feet/Carton

680, 681, 682 – 1.02 lbs/SF; 48 SF/ctn  
683, 684, 685 – 1.02 lbs/SF; 64 SF/ctn  
686, 687 – 1.40 lbs/SF; 48 SF/ctn  
688 – 1.02 lbs/SF; 64 SF/ctn

### Minimum Order Quantity

1 carton, excludes other sizes

### Metric Items Available

680M, 683M, 682M, 681M – Metric items are subject to extended lead times and minimum quantities. Contact your representative for more details.



TechLine<sup>SM</sup> / 1 877 ARMSTRONG  
[armstrong.com/commceilings](http://armstrong.com/commceilings)  
(search: mesa)  
BPCS-3642-813

LEED® is a registered trademark of the U.S. Green Building Council  
All other trademarks used herein are the property of AWI Licensing Company and/or its affiliates © 2013 AWI Licensing Company  
Printed in the United States of America

