


CIRRUS® High-NRC
Square Lay-in & Tegular
 medium texture



Cirrus High-NRC with Silhouette® 9/16" 1/4" reveal suspension system (Pg. 261)


KEY SELECTION ATTRIBUTES

- Refined visual
- Excellent solution in mixed (open plan/closed plan) office design
- Excellent combination of acoustical performance; Articulation Class (170), NRC (0.75), and CAC (35)
- 94% Biobased content (see page 331)

TYPICAL APPLICATIONS

- Open plan and closed offices
- Healthcare – assists in addressing HIPAA and FGI acoustical requirements
- Libraries/media centers
- Lobbies/reception areas
- Computer rooms

DETAIL (Other Suspension Systems compatible. Refer to listing on page 154.)

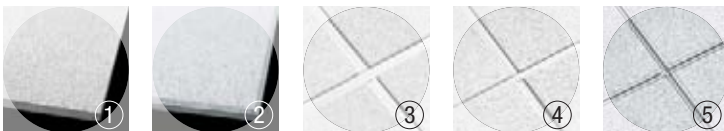

1. Cirrus High-NRC Square Lay-in
2. Cirrus High-NRC Beveled Tegular
3. Cirrus High-NRC Angled Tegular with Prelude® 15/16" suspension system
4. Cirrus High-NRC Beveled Tegular with Suprafine® 9/16" suspension system
5. Cirrus High-NRC Beveled Tegular with Silhouette 9/16" 1/4" Reveal suspension system

COLOR



CIRRUS® High-NRC

Square Lay-in & Tegular
medium texture

UP TO **73%** RECYCLED CONTENT

LEED®

- local* materials
- waste mgmt
- recycled content
- renewable materials
- indoor air quality
- daylight & views
- energy
- acoustics

Calculate LEED contribution at armstrong.com/greengenie

*LOCATION DEPENDENT

VISUAL SELECTION

PERFORMANCE

Dots represent high level of performance.

Edge Profile	Susp. Dwg. Pgs. 273-277 armstrong.com/catdwgs	Item No.	Dimensions (Inches)	Acoustics			Fire Rating	Light Reflect	Anti-Mold & Mildew	Sag Resist	Certified Low VOC Emissions	Durability	Recycled Content*	Recycle Program	Warranty*
				NRC	CAC	α _{0.5}									
CIRRUS High-NRC				UL Classified					BioBlock+	Humi-Guard+				Yes	No. of Years
15/16" Square Lay-in	1	563	24 x 24 x 7/8" □	0.75	35	170	Class A	0.85	•	•	•	Std	High	•	30
	1	565	24 x 48 x 7/8" □	0.75	35	170	Class A	0.85	•	Std	•	Std	High	•	10
	1	Other Sizes	W: 4" - 24" / L: 4" - 48" 7/8" thick	0.75	35	170	Class A	0.85	•	Std	•	Std	High	•	10
15/16" Angled Tegular	13	556	24 x 24 x 7/8" □	0.75	35	170	Class A	0.85	•	•	•	Std	High	•	30
	13	551	24 x 48 x 7/8" □	0.75	35	170	Class A	0.85	•	Std	•	Std	High	•	10
	13	Other Sizes	W: 4" - 24" / L: 4" - 48" 7/8" thick	0.75	35	170	Class A	0.85	•	Std	•	Std	High	•	10
9/16" Beveled Tegular	29, 44, 48, 52, 56, 60	558	24 x 24 x 7/8" □	0.75	35	170	Class A	0.85	•	•	•	Std	High	•	30
	29, 44, 48, 52, 56, 60	568	24 x 48 x 7/8" □	0.75	35	170	Class A	0.85	•	Std	•	Std	High	•	10
	29, 44, 48, 52, 56, 60	Other Sizes	W: 4" - 24" / L: 4" - 48" 7/8" thick	0.75	35	170	Class A	0.85	•	Std	•	Std	High	•	10

SUSPENSION SYSTEMS



PHYSICAL DATA

Material

Wet-formed mineral fiber

Surface Finish

Factory-applied latex paint

Fire Performance

ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index 25 or less. Smoke Developed Index 50 or less. (UL labeled)

ASTM E1264 Classification

Type III, Form 1, Pattern E I C
Fire Class A

Sag Resistance

HumiGuard® Plus – superior resistance to sagging in high humidity conditions up to, but not including, standing water and outdoor applications. Excludes items 565, 551, 568, and other sizes.

Anti Mold/Mildew & Bacteria

BioBlock® Plus contains an anti-microbial treatment and provides guaranteed resistance against growth of mold/mildew and Gram-positive and Gram-negative odor/stain-causing bacteria for 30 years.

VOC Emissions

Third party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.1, 2010. This standard is the guideline for low emissions in LEED, CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

High Recycled Content*

Contains greater than 50% total recycled content. Total recycled content based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines.

Insulation Value

R Factor – 2.3 (BTU units)
R Factor – 0.40 (Watts units)

30-Year Performance Guarantee & Warranty†

When installed with Armstrong Suspension System. Details at armstrong.com/warranty

Weight; Square Feet/Carton

551, 565, 568 – 1.21 lbs/SF; 48 SF/ctn
556, 558 – 1.40 lbs/SF; 40 SF/ctn
563 – 1.33 lbs/SF; 40 SF/ctn

Minimum Order Quantity

1 carton, excludes other sizes

Metric Items Available

558M, 568M, 556M, 561M, 563M, 565M – Metric items are subject to extended lead times and minimum quantities. Contact your representative for more details.



TechLine™ / 1 877 ARMSTRONG
armstrong.com/commcceilings
(search: cirrus)
BPCS-3043-813

LEED® is a registered trademark of the U.S. Green Building Council
All other trademarks used herein are the property of AWI Licensing Company and/or its affiliates © 2013 AWI Licensing Company
Printed in the United States of America

