

# FINE FISSURED™ High-NRC

## Square Lay-in & Tegular

medium texture



Fine Fissured High-NRC with Suprafine® 9/16" suspension system (Pg. 266)


### KEY SELECTION ATTRIBUTES

- Good solution in mixed (open plan/ closed plan) office design
- Excellent combination of acoustical performance; Articulation Class (170), NRC (0.75), and CAC (35)
- Non-directional visual reduces installation time and scrap

### TYPICAL APPLICATIONS

- Open plan offices
- Healthcare – assists in addressing HIPAA and FGI acoustical requirements
- Classrooms
- Libraries/media centers
- Lobbies/reception areas
- Computer rooms

### DETAIL (Other Suspension Systems compatible. Refer to listing on page 178.)

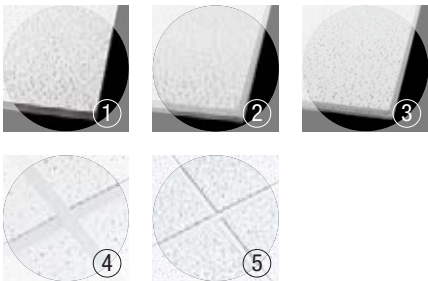

1. Fine Fissured High-NRC Square Lay-in
2. Fine Fissured High-NRC Angled Tegular
3. Fine Fissured High-NRC Beveled Tegular
4. Fine Fissured High-NRC Square Lay-in on Prelude® 15/16" suspension system
5. Fine Fissured High-NRC Beveled Tegular on Suprafine 9/16" suspension system

### COLOR



White

# FINE FISSURED™ High-NRC

Square Lay-in & Tegular  
medium texture

UP TO **73%** RECYCLED CONTENT

**LEED®**

- acoustics
- energy
- daylight & views
- indoor air quality
- renewable materials
- recycled content
- waste mgmt
- local\* materials




Calculate LEED contribution at [armstrong.com/greengenie](http://armstrong.com/greengenie)

\*LOCATION DEPENDENT


## VISUAL SELECTION

## PERFORMANCE

Dots represent high level of performance.

Edge Profile	Susp. Dwg. Pgs. 273-277 <a href="http://armstrong.com/catdwgs">armstrong.com/catdwgs</a>	Item No.	Dimensions (Inches)	Acoustics			Fire Rating	Light Reflect	Anti-Mold & Mildew	Sag Resist	Certified Low VOC Emissions	Durability	Recycled Content*	Recycle Program	Warranty†
				NRC	CAC	AC									
<b>FINE FISSURED High-NRC</b>															
				UL Classified					Humi-Guard+				Yes		No. of Years
15/16" Square Lay-in 	1	<b>1754</b>	24 x 24 x 7/8"	0.75	35	170	Class A	0.86	•	•	–	Std	High	•	30
	1	<b>1755</b>	24 x 48 x 7/8"	0.75	35	170	Class A	0.86	•	Std	–	Std	High	•	1
15/16" Angled Tegular 	1	<b>1756</b>	24 x 24 x 7/8"	0.75	35	170	Class A	0.86	•	•	–	Std	High	•	30
	1	<b>1757</b>	24 x 48 x 7/8"	0.75	35	170	Class A	0.86	•	Std	–	Std	High	•	1
9/16" Beveled Tegular 	29, 44, 48, 52, 56, 60	<b>1758</b>	24 x 24 x 7/8"	0.75	35	170	Class A	0.86	•	•	–	Std	High	•	30
	29, 44, 48, 52, 56, 60	<b>1759</b>	24 x 48 x 7/8"	0.75	35	170	Class A	0.86	•	Std	–	Std	High	•	1

## SUSPENSION SYSTEMS

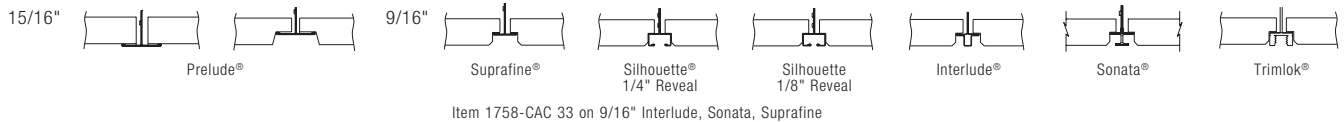

## PHYSICAL DATA

### Material

Wet-formed mineral fiber

### Surface Finish

Factory-applied latex paint

### Fire Performance

ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index 25 or less. Smoke Developed Index 50 or less. (UL labeled)

### ASTM E1264 Classification

Type III, Form 1, Pattern C E  
Fire Class A

### Sag Resistance

HumiGuard® Plus – superior resistance to sagging in high humidity conditions up to, but not including, standing water and outdoor applications. (Excludes Items 1755, 1759, 1757).

### Anti Mold/Mildew & Bacteria

BioBlock® Plus contains an anti-microbial treatment and provides guaranteed resistance against growth of mold/mildew and Gram-positive and Gram-negative odor/stain-causing bacteria for 30 years.

### High Recycled Content\*

Contains greater than 50% total recycled content. Total recycled content based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines.

### Insulation Value

R Factor – 2.3 (BTU units)  
R Factor – 0.40 (Watts units)

### 30-Year Performance Guarantee & Warranty†

When installed with Armstrong Suspension System. Details at [armstrong.com/warranty](http://armstrong.com/warranty)

### Weight; Square Feet/Carton

1754, 1756, 1758 – 1.08 lbs/SF; 40 SF/ctn  
1755, 1757, 1759 – 1.08 lbs/SF; 48 SF/ctn

### Minimum Order Quantity

1 carton

### Metric Items Available

1754M, 1755M, 1758M, 1759M 1756M, 1757M– Metric items are subject to extended lead times and minimum quantities. Contact your representative for more details.



MINERAL FIBER