



RANDOM FISSURED™

Square Lay-in
fine texture


UP TO 71% RECYCLED CONTENT

LEED®



Calculate LEED contribution at armstrong.com/greengenie

*LOCATION DEPENDENT

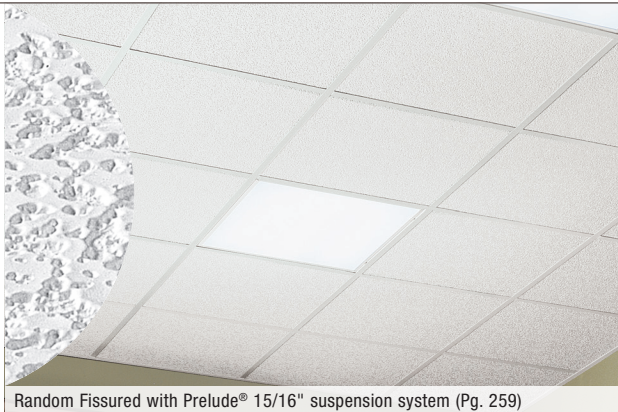

Random Fissured with Prelude® 15/16" suspension system (Pg. 259)

KEY SELECTION ATTRIBUTES

- Excellent sound absorption (perforated options)
- Easy-clean, durable surface
- Economical
- 30-Year Limited System Warranty against visible sag, mold/mildew, and bacterial growth

TYPICAL APPLICATIONS

- Discount/grocery stores
- Locker rooms
- Utility rooms
- Lavatories/restrooms

COLOR



White

VISUAL SELECTION


PERFORMANCE

 Dots represent high level of performance.

Edge Profile	Susp. Dwg. Pgs. 273-277	Item No.	Dimensions (Inches)	Acoustics		Fire Rating	Light Reflect	Anti-Mold & Mildew	Sag Resist	Certified Low VOC Emissions	Durability					Recycled Content*	Recycle Program	Warranty†	
				NRC	CAC						Water Repel	Wash	Scrub	Impact	Soil				No. of Years
RANDOM FISSURED (Perforated)				UL Classified	Inherent	Humi-Guard+													
15/16" Square Lay-in	1	2908	24 x 24 x 5/8" □	0.70	N/A	Class A	0.72	•	•	-	-	•	•	•	•	•	High	-	30
	1	2910	24 x 48 x 5/8" □	0.70	N/A	Class A	0.72	•	•	-	-	•	•	•	•	•	High	-	30
	1	Other Sizes	W: 12" - 30" / L: 12" - 60" 5/8" Thick	0.70	N/A	Class A	0.72	•	•	-	-	•	•	•	•	•	High	-	30
RANDOM FISSURED (Unperforated)																			
15/16" Square Lay-in	1	2909	24 x 24 x 5/8" □	0.55	N/A	Class A	0.72	•	•	-	•	•	•	•	•	•	High	-	30
	1	2911	24 x 48 x 5/8" □	0.55	N/A	Class A	0.72	•	•	-	•	•	•	•	•	•	High	-	30
	1	Other Sizes	W: 12" - 30" / L: 12" - 60" 5/8" Thick	0.55	N/A	Class A	0.72	•	•	-	•	•	•	•	•	•	High	-	30

SUSPENSION SYSTEMS

15/16"



Prelude®

PHYSICAL DATA

Material
Fiberglass with vinyl facing

Surface Finish
Scrubable vinyl film facing (UV protected)

Fire Performance
ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index 25 or less. Smoke Developed Index 50 or less. (UL labeled)

ASTM E1264 Classification
2908, 2910 – Type XII, Form 1, Pattern E C
2909, 2911 – Type XII, Form 1, Pattern E
Fire Class A



Sag Resistance
HumiGuard® Plus – superior resistance to sagging in high humidity conditions up to, but not including, standing water and outdoor applications.

Anti Mold/Mildew & Bacteria
Fiberglass substrate is inherently resistant to the growth of mold, mildew, and bacteria.

High Recycled Content*
Contains greater than 50% total recycled content. Total recycled content based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines.

Acoustical Details
A CAC value of 37 can be achieved by backloading fiberglass products with item 769 or 770.

Insulation Value
R Factor - 2.6 (BTU units)
R Factor - 0.46 (Watts units)

30-Year Performance Guarantee & Warranty†
When installed with Armstrong Suspension System. Details at armstrong.com/warranty

Weight; Square Feet/Carton
0.17 lbs/SF; 128 SF/ctn

Minimum Order Quantity
1 carton, excludes special sizes

Metric Items Available
Items 2908M, 2910M, 2909M, 2911M – Metric items are subject to extended lead times and minimum quantities. Contact your representative for more details.

TechLine™ / 1 877 ARMSTRONG
armstrong.com/commceilings
(search: random fissured)
BPCS-3696-413

LEED® is a registered trademark of the U.S. Green Building Council
All other trademarks used herein are the property of AWI Licensing Company and/or its affiliates © 2013 AWI Licensing Company
Printed in the United States of America

